




OPERATING MANUAL

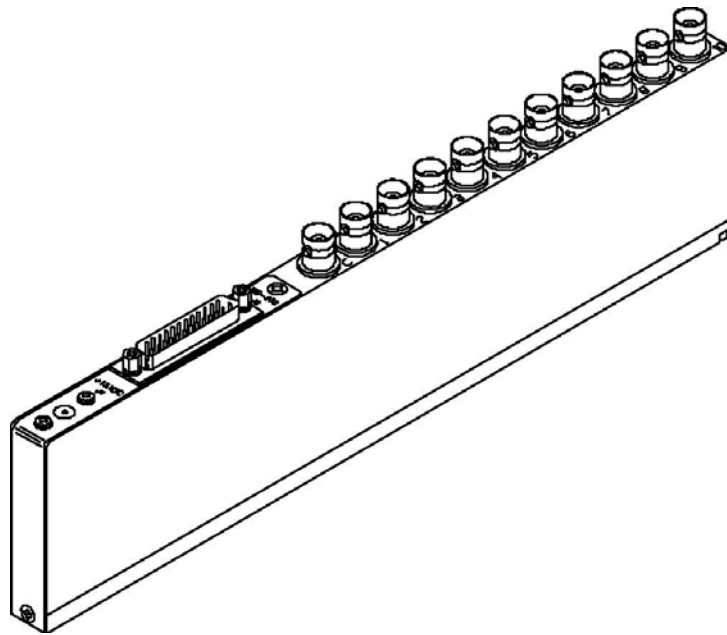

Series RS70000 shown above

Series 70000 & RS70000

Coaxial Relay

State-of-the-Art Switching Solutions

Warranty

This Universal Switching Corporation product is warranted against manufacturing defects, and workmanship for a period of two years from the date of shipment from our factory. During this period, Universal Switching will, at its option, either repair or replace products which prove to be defective or out of specification per the original purchase order or contract. Damage by misuse or abnormal conditions of operation, or evidence of partial or complete disassembly beyond normal maintenance or expansion procedures voids this warranty. Since Universal Switching Corporation has no control over conditions of use for the products it manufactures, no warranty is made or implied as to the suitability for the customer's intended use, beyond such performance specifications as are made a part of the purchase order or contract.

Equipment shipped F.O.B. Universal Switching Corporation shall become the property of the Buyer upon delivery to the carrier. Equipment shipped F.O.B. Destination shall become the property of the Buyer upon delivery acceptance from the carrier. Damage during shipment, for items shipped F.O.B. Universal Switching Corporation should be handled by immediately requesting the carrier's inspection upon evidence of damage to the equipment. This warranty excludes all other warranties expressed or implied. Universal Switching Corporation shall not be liable for any special, indirect, or consequential damages.

For warranty service or repair, the Buyer shall prepay shipping charges to Universal Switching Corporation, and Universal Switching Corporation shall pay shipping charges to return the product to the Buyer. However, Buyer shall pay all shipping charges, duties, and taxes for products returned to Universal Switching Corporation from another country.

Universal Switching Corporation warrants that its software and firmware designated by Universal Switching Corporation for use with an instrument will execute its programming instructions when properly installed on that instrument. Universal Switching Corporation does not warrant that the operation of the instrument, or software, or firmware will be uninterrupted or error-free.

TECHNICAL SUPPORT

Phone +1 818 381-5111
Fax +1 818 252-4868
Email support@uswi.com

7671 North San Fernando Road
Burbank, CA 91505-1073 USA
www.uswi.com

TABLE OF CONTENTS

1.	INTRODUCTION TO THE SERIES 70000 & RS70000 COAXIAL RELAYS.....	7
2.	SETUP.....	9
2.1.	Preventing Electrostatic Discharges (ESD)	9
2.1.1.	Anti-Static Protection.....	9
2.2.	Serial Number Label.....	10
2.3.	Unpacking.....	10
2.4.	Installation and Removal.....	10
2.5.	Environmental Limits.....	11
2.5.1.	Storage and Shipping.....	11
2.5.2.	Operating Environment.....	11
2.5.3.	Installation Site Parameters.....	11
2.6.	Return Shipment	12
2.6.1.	Return Address	12
3.	SERIES 70000 COAXIAL RELAYS	13
3.1.	Series 70000 Model Number Defintion	13
3.2.	Typical Isolation for Series 70000.....	15
3.3.	Insertion Loss for Series 70000 – 2 throws to 24 throws	15
3.4.	Relay Enclosure Design Series 70000.....	16
3.4.1.	Sizing	17
3.4.2.	Mounting	17
3.4.3.	Cooling.....	17
3.4.4.	DB-25P Connector Pinout.....	18
4.	SERIES RS70000 COAXIAL RELAYS	19
4.1.	Series RS70000 Model Number Defintion	19
4.2.	Typical Isolation for Series RS70000.....	20
4.3.	Insertion Loss for Series RS70000 – 2 throws to 24 throws	20
4.4.	Relay Enclosure Design Series RS70000	21
4.4.1.	Sizing	22
4.4.2.	Mounting	22
4.4.3.	Cooling.....	22
4.4.4.	DB-25P Connector Pinout J2.....	23
4.4.5.	Relay Interface/Driver Board.....	23
4.4.6.	Wall Mount Power Supply	24
5.	PROGRAMMING THE SERIES RS70000	25
5.1.1.	Serial Control Parameters.....	25
5.1.2.	Command Syntax and Operators	25
6.	SERVICE	27
7.	SPECIFICATIONS.....	29

1. Introduction to the Series 70000 & RS70000 Coaxial Relays

The Series 70000 & RS70000 Coaxial Relays are available in configurations from 2x1 up to 24x1. All of the Series 70000 & RS70000 Coaxial Relays are designed to maintain coaxial switching continuity over a wide range of critical and high environmental applications. The relay housings are constructed of precision machined aluminum alloy for structural integrity and anodized for durability and corrosion resistance. Each signal path is a true coaxial path with switched center contacts. The covers are gasketed for maximum EMI protection. The basic reed switch elements are hermitically sealed in nitrogen filled gas envelopes and employ rhodium plated contacts to insure non-stick operation. The connector shields are continuous and are grounded to the housing.

The Series 70000 Coaxial Relay may be controlled alone by supplying the appropriate DC voltage at the appropriate connector pin, or installed in a Model U11600 rack mount chassis complete with relay drivers, remote control ports and power supplies.

The Series RS70000 Coaxial Relay has a built-in serial control port and includes a wall mount power supply for standalone applications.

Key features include the following:

- DC up to 800MHz frequency range (Model specific)
- DB-25P interface control connector
- BNC signal connectors standard
- Variety of output configurations
- Continuous shield continuity
- Individual field replaceable switch points
- Extremely low EMI
- Low VSWR
- Optional signal connectors on some models
- Optional insulated and switched coaxial shields
- Optional coil suppression diodes on 70000 Series

2. Setup

This section contains cautions, notes and instructions on how to configure the Series 70000 & RS70000 Coaxial Relays in preparation for operation.

It is important to follow the instructions in this section to assure safe and trouble-free operation. The information is provided to maximize the performance and expected lifetime of the relay module.

2.1. Preventing Electrostatic Discharges (ESD)

Electrostatic discharges (ESD) are the most severe form of electromagnetic interference. The human body can build up static charges that range up to many thousands volts. These build-ups can discharge very rapidly into an electrically grounded body or device. Damage to the internal components of a sensitive device can occur with just one static discharge.

The most common causes of ESD are the human body, low humidity, improper grounding, unshielded cables, and poor connections.

2.1.1. Anti-Static Protection

Electronic components can be damaged by electrostatic discharges (ESD). The technician handling the component must know about static electricity and how to protect the components from ESD.



CAUTION: All personnel must employ Anti-Static procedures and use Anti-Static protection at all times. Failure to observe this CAUTION could lead to damage to equipment.

2.2. Serial Number Label

The Series 70000 & RS70000 coaxial relays have a unique factory assigned model number that defines the user requirements for a specific number of throws, coil voltage (if applicable), coil suppression diodes (if applicable), and optional connector type and insulated and switched coaxial shielding.

An identifying label is affixed on the end of the relay housing. The label contains both model number and unique serial number.

2.3. Unpacking

The Series 70000 & RS70000 coaxial relays are packed in antistatic material and shipped in custom commercial packaging. Please pay attention when opening the shipping container so as not to inflict any cosmetic damage. Check the packing list against the contents of the shipping container.



NOTE: Carefully inspect the packaging for shipping damage and if present, immediately notify Universal Switching Corporation and the carrier. Keep all shipping materials for the carrier's inspection.

If the contents are not complete, or there is any kind of mechanical damage or visible defects, you must notify the factory within five (5) days of receipt.

2.4. Installation and Removal

The Series 70000 coaxial relays may be installed in a standard model 11600 mainframe. Attaching hardware is available on request.

The Series RS70000 coaxial relays are designed for standalone operation using the wall mount power supply.

2.5. Environmental Limits

You may operate the coaxial relays in a normal laboratory environment, production environment, or a more rugged industrial environment without any additional considerations. Protection should be provided against temperature extremes (shock), which can cause condensation.

2.5.1. Storage and Shipping

The coaxial relays may be stored or shipped in environments with the following limitations:

- Temperature: -20 degrees C to +60 degrees C
- Humidity: 0 to 98% (non-condensing)
- Altitude: 50,000 feet

2.5.2. Operating Environment

The coaxial relays may be used in any environment with the following limitations:

- Temperature: 0 degrees C to +50 degrees C
- Humidity: 0 to 98% (non-condensing)

2.5.3. Installation Site Parameters

The area in which the coaxial relay is to be operated should be as clean as possible. An environmentally controlled area is recommended.

2.6. Return Shipment

If a Series 70000 & RS70000 coaxial relay is to be shipped back to the factory for service or modification, it is recommended that the original custom commercial packaging be used. Attach a tag identifying the current owner (including address and phone number) model and serial number of the coaxial relay or component, as well as a brief description of the required service or suspected problem.

Mark the container **FRAGILE** to help insure safe handling by the carrier. In correspondence, refer to the return item by the model number and serial number.



NOTE: Please call the factory prior to returning a relay. Return is not always necessary as many problems may be solved over the phone. If return is necessary, the factory shall assign an RMA number. No returned unit shall be accepted without an RMA number.

2.6.1. Return Address

When returning the module for repair or service, please use the following address:

Universal Switching Corporation
7671 North San Fernando Road
Burbank, CA 91505-1073 USA



NOTE: Additional information is available at the Universal Switching Corporation website: www.uswi.com

3. Series 70000 Coaxial Relays

The Series 70000 coaxial relay provides high performance and advanced features for best signal and connection reliability. They deliver compact switching technology in a rugged package design.

This section describes the features and structural design qualities of the Series 70000 coaxial relays.

3.1. Series 70000 Model Number Definition

The Series 70000 model number defines the contact configuration, number of throws, coil voltage, and options such as coil suppression diodes, custom connectors (SMA, TNC, F-type), and insulated switched coaxial shields. For ordering, all part numbers are prefaced with "U" and break down as follows:

Part number: U 7 **(CC)** **(NT)** - **(V)** or **(D)** or **(X)**

(CC) Contact configuration

- 10 - Standard configuration (normally open) 100VDC, 250ma, 10W
- 25 - Standard (self-terminating type, 50 ohm) 4VDC, 250ma, 1/3W
- 27 - Standard (self-terminating type, 75 ohm) 4VDC, 250ma, 1/3W
- 30 - Medium isolation (normally open) 100VDC, 250ma, 10W
- 40 - High isolation (normally open) 28VDC, 250ma, 3W
- 65 - High isolation (self-terminating type, 50 ohm) 4VDC, 250ma, 1/3W
- 67 - High isolation (self terminating type, 75 ohm) 4VDC, 250ma, 1/3W
- 70 - Mercury wetted* (normally open) 500VDC, 2A, 50W
- 90 - Standard with Triaxial connector (BJ-77) 100VDC, 250ma, 10W

* Due to environmental laws, mercury wetted contacts may not be available.

- (NT)** Number of throws
- 02 - 2x1
 - 04 - 4x1
 - 08 - 8x1
 - 12 - 12x1
 - 16 - 16x1
 - 24 - 24x1
- (V)** Coil voltage
- 1 - 24VDC to 28VDC (100 ohm coils)
 - 2 - 15VDC (500 ohm coils)
 - 5 - 5VDC (250 ohms coils) only for contact types 10 -30
- (D)** Coil suppression diodes
- 0 - Not included
 - P - Suppression diodes included with coil common positive
 - N - Suppression diodes included with coil common negative
- (X)** Extra options
- A - SMA signal connectors (on contact types 10, 25, 27, 65)
 - F - F-type signal connectors (on contact types 10, 27)
 - I - Insulated coaxial shield (on contact types 10, 25, 27, 70)
 - S - Insulated and switched coaxial shield (on contact type 10, 25, 27, 70)

3.2. Typical Isolation for Series 70000

<u>Model</u>	<u>1MHz</u>	<u>10MHz</u>	<u>100MHz</u>	<u>100-300MHz</u>	<u>300-600MHz</u>
U71xxx	80dB	65dB	45dB		
U72xxx	95dB	75dB	55dB		
U73xxx	105dB	85dB	65dB		
U74xxx (not avail with I, S option)	160dB	140dB	120dB	80dB	60dB
U76xxx (not avail with I, S option)	140dB	120dB	100dB		
U77xxx	90dB	70dB	50dB		
U79xxx	90dB	70dB	50dB		



3.3. Insertion Loss for Series 70000 – 2 throws to 24 throws

<u>Model</u>		
U7xx02	<1dB@ DC to 700MHz	<3dB@ DC to 800MHz
U7xx04	<1dB@ DC to 338MHz	<3dB@ DC to 419MHz
U7xx08	<1dB@ DC to 166MHz	<3dB@ DC to 214MHz
U7xx12	<1dB@ DC to 110MHz	<3dB@ DC to 144MHz
U7xx16	<1dB@ DC to 82MHz	<3dB@ DC to 108MHz
U7xx24	<1dB@ DC to 54MHz	<3dB@ DC to 72MHz

3.4. Relay Enclosure Design Series 70000

The Series 70000 coaxial relay design uses a machined aluminum alloy enclosure that is anodized for durability and corrosion resistance. The design of the enclosure provides a rigid framework that houses a collection of components including wiring, coils, reed switches, PCB, and BNC connectors.

Below is a typical Series 70000 enclosure Model U71012 (12x1) showing the locations of the input/output BNC connectors, and DB-25P connector (P1) for power and control.

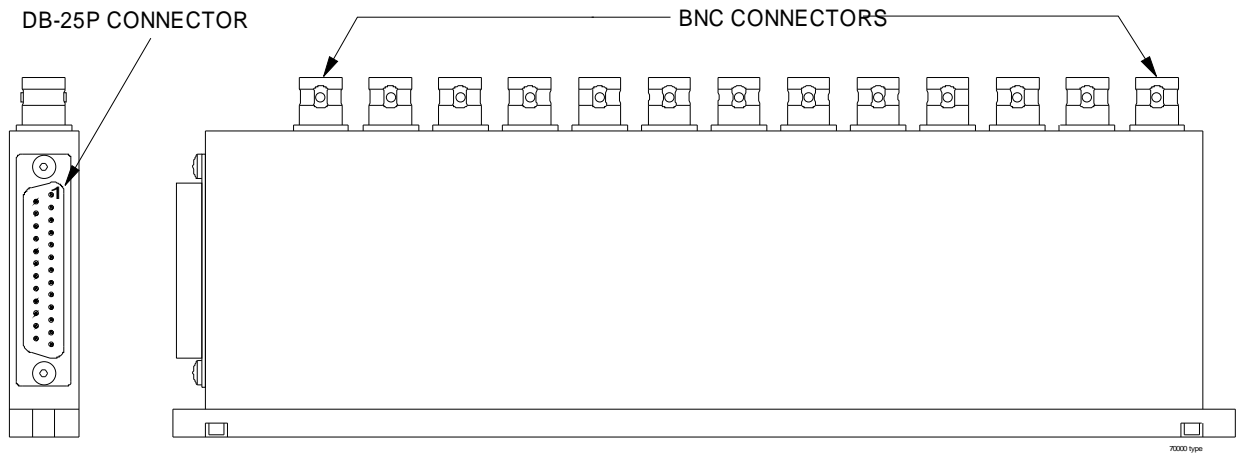

3.4.1. Sizing

The dimension table below illustrates the various lengths for configurations of the 70000 coaxial relays.

The overall height is 3.25" Max, and the housing thickness is 0.62" Max.

TABLE FOR 70000 COAXIAL RELAYS		
Model	Configuration	Overall Length
U7xx02	2x1	3.26"
U7xx04	4x1	4.51"
U7xx08	8x1	7.01"
U7xx12	12x1	9.51"
U7xx16	16x1	12.01"
U7xx24	24x1	17.01"

3.4.2. Mounting

Mounting is achieved by securing to the baseplate using 4x40 machine screws.

3.4.3. Cooling

The Series 70000 coaxial relays are cooled by convection. No fans are required.

3.4.4. DB-25P Connector Pinout

The Series 70000 coaxial relays utilize a DB-25P connector for power to individually control each port. The table below lists the pinout. Select the appropriate pins according to the coaxial relay configuration.

DB-25P Connector Pin Out	Signal Name
1	Port 1
2	Port 2
3	Port 3
4	Port 4
5	Port 5
6	Port 6
7	Port 7
8	Port 8
9	Port 9
10	Port 10
11	Port 11
12	Port 12
13	Port 13
14	Port 14
15	Port 15
16	Port 16
17	Port 17
18	Port 18
19	Port 19
20	Port 20
21	Port 21
22	Port 22
23	Port 23
24	Port 24
25	Common

4. Series RS70000 Coaxial Relays

This section describes the features and structural design qualities of the Series RS70000 coaxial relays.

4.1. Series RS70000 Model Number Definition

The Series RS70000 model number defines the contact configuration, number of throws, and options such as custom connectors (SMA, TNC, F-type), and insulated switched coaxial shields. For ordering, all part numbers are prefaced with "U" and break down as follows:

Part number: U RS7 **(CC)** **(NT)** - **(X)**

(CC) Contact configuration

- 10 - Standard configuration (normally open) 100VDC, 250ma, 10W
- 25 - Standard (self-terminating type, 50 ohm) 4VDC, 250ma, 1/3W
- 27 - Standard (self-terminating type, 75 ohm) 4VDC, 250ma, 1/3W
- 30 - Medium isolation (normally open) 100VDC, 250ma, 10W
- 40 - High isolation (normally open) 28VDC, 250ma, 3W
- 65 - High isolation (self-terminating type, 50 ohm) 4VDC, 250ma, 1/3W
- 67 - High isolation (self terminating type, 75 ohm) 4VDC, 250ma, 1/3W
- 70 - Mercury wetted* (normally open) 500VDC, 2A, 50W
- 90 - Standard with Triaxial connector (BJ-77) 100VDC, 250ma, 10W

* Due to environmental laws, mercury wetted contacts may not be available.

(NT) Number of throws

- 02 - 2x1
- 04 - 4x1
- 08 - 8x1
- 12 - 12x1
- 16 - 16x1
- 24 - 24x1

(X) Extra options

- A - SMA signal connectors (on contact types 10, 25, 27, 65)
- F - F-type signal connectors (on contact types 10, 27)
- I - Insulated coaxial shield (on contact types 10, 25, 27, 70)
- S - Insulated and switched coaxial shield (on contact type 10, 25, 27, 70)

4.2. Typical Isolation for Series RS70000

<u>Model</u>	<u>DC</u>	<u>10MHz</u>	<u>100MHz</u>	<u>100-300MHz</u>	<u>300-600MHz</u>
URS71xxx	80dB	65dB	45dB		
URS72xxx	95dB	75dB	55dB		
URS73xxx	105dB	85dB	65dB		
URS74xxx (not avail with I, S option)	160dB	140dB	120dB	80dB	60dB
URS76xxx (not avail with I, S option)	140dB	120dB	100dB		
URS77xxx	90dB	70dB	50dB		
URS79xxx	90dB	70dB	50dB		


4.3. Insertion Loss for Series RS70000 – 2 throws to 24 throws

<u>Model</u>		
URS7xx02	<1dB@ DC to 700MHz	<3dB@ DC to 800MHz
URS7xx04	<1dB@ DC to 338MHz	<3dB@ DC to 419MHz
URS7xx08	<1dB@ DC to 166MHz	<3dB@ DC to 214MHz
URS7xx12	<1dB@ DC to 110MHz	<3dB@ DC to 144MHz
URS7xx16	<1dB@ DC to 82MHz	<3dB@ DC to 108MHz
URS7xx24	<1dB@ DC to 54MHz	<3dB@ DC to 72MHz

4.4. Relay Enclosure Design Series RS70000

The Series RS70000 coaxial relay design uses a rectangular machined aluminum alloy enclosure that is anodized for durability and corrosion resistance. The design of the enclosure provides a rigid framework that houses a collection of components including wiring, coils, reed switches, serial interface board with power and control connectors, PCB, and BNC signal connectors.

Below is a typical Series RS70000 enclosure Model URS71002 (2x1) showing the locations of the BNC connectors, DB-25P connector, and wall mount power supply.

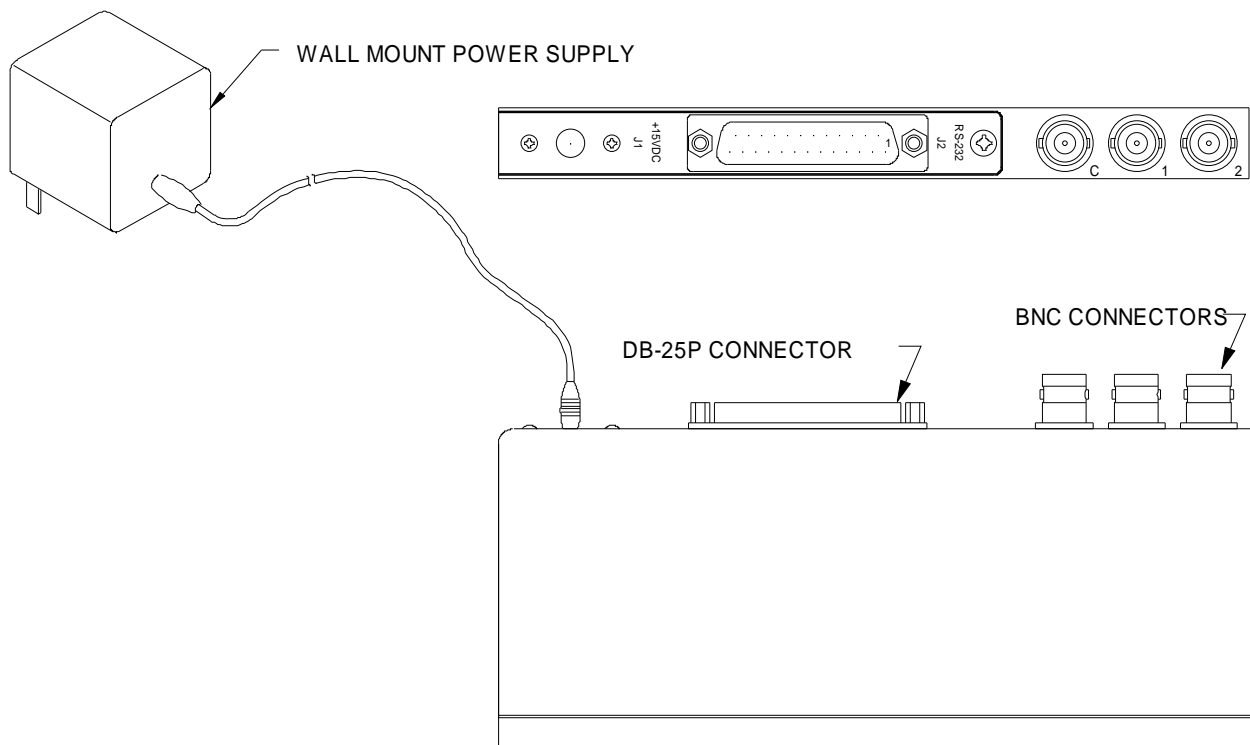

4.4.1. Sizing

The dimension table below illustrates the various lengths for configurations of the RS70000 coaxial relay.

The overall height is 3.25" Max, and the housing thickness is 0.62" Max.

TABLE FOR RS70000 COAXIAL RELAY		
Model	Configuration	Overall Length
URS7xx02	2x1	6.56"
URS7xx04	4x1	7.81"
URS7xx08	8x1	10.31"
URS7xx12	12x1	12.81"
URS7xx16	16x1	15.31"
URS7xx24	24x1	20.31"

4.4.2. Mounting

Mounting is achieved by securing to the baseplate using 4x40 machine screws.

4.4.3. Cooling

The Series RS70000 coaxial relays are cooled by convection. No fans are required.

4.4.4. DB-25P Connector Pinout J2


The Series RS70000 coaxial relays utilize a DB-25P connector. The table below lists the pinout for serial control.

DB-25P Connector Pin Out	Signal Name
2	Transmit (TXD)
3	Receive (RXD)
7	Signal Ground (SG)
1	Frame Ground (FG)

4.4.5. Relay Interface/Driver Board

The Series RS70000 coaxial relays utilize an Interface/Driver board to provide latching and coil drive for the relays. The RS70000 coaxial relay module must be connected to a RS-232C port.

The control input connector is a DB-25P connector (J2). The output connector is the PCB edge with gold plated contacts. The interface/driver board plugs into Series RS70000 coaxial relay and mates with a Cinch 50-30C-10 connector within the coaxial relay module. The interface/driver board receives power from the connector labeled J1.

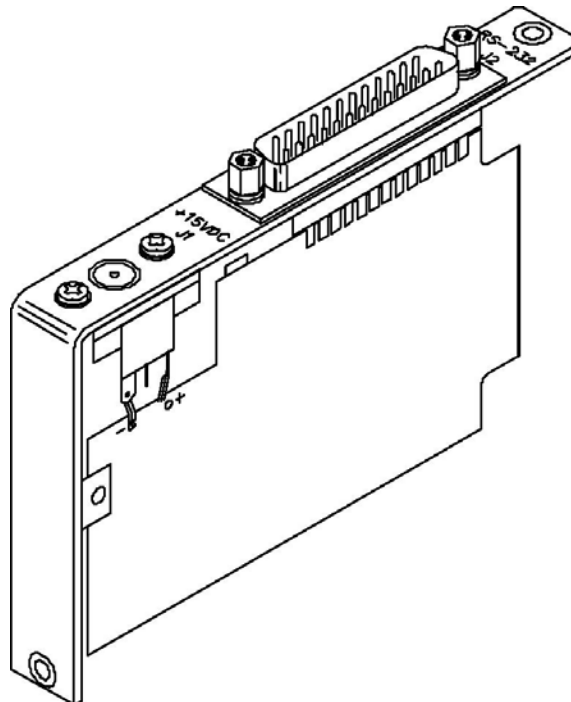

4.4.6. Wall Mount Power Supply

The wall mount power supply is a +15VDC, 0.6A source that interfaces with a standard 2.0 mm post power jack that is center negative.

The power connector (J1), as well as the serial interface (J2), are conveniently located on the top of the Series RS70000 coaxial relay housing.

5. Programming the Series RS70000

When the relay module is connected to a standard RS-232C port, the interface board decodes control commands consisting of three (3) ASCII characters followed by a carriage return (CR).

There are three (3) possible operations: **S**, **R**, **CLR**

- **S** Set to energize a port
- **R** Re-Set to de-energize a port
- **CLR** Clear all to clear all connections

5.1.1. Serial Control Parameters

The serial control parameters are 9600 baud, no parity, 8 data bits, and 1 stop bit.

5.1.2. Command Syntax and Operators

Commands are sent using standard ASCII strings, upper case and three (3) characters in length. All commands end with a carriage return (CR). The port numbers range from 01 to 24 depending on relay module configuration.

- Example to Set (energize) port -01: **S01 (CR)**
- Example to Re-Set (de-energize) port-01: **R01 (CR)**
- Example to clear connections: **CLR (CR)**

When successful, the command is echoed back. Unsuccessful commands return the following errors:

- E01 for unrecognized command
- E02 for port less than 01 or greater than 24

6. Service

The Series 70000 & RS70000 coaxial relay modules are reliable assemblies needing no regular service. If a component within the coaxial relay module assembly fails, such as a reed relay or interface/driver board, contact Technical Support for assistance.

For ordering coaxial relay modules, all 70000 and RS70000 part numbers are prefaced with "U"

Universal Switching Corporation
7671 North San Fernando Road
Burbank, CA 91505-1073 USA

Technical Support +1 818 381-5111



NOTE: Additional information is available at www.uswi.com

7. Specifications

• Configuration	2x1 up to 24x1 I/O configurations
• User connectors	Top location, BNC (standard)
• Interface connector	Top location, DB-25P, Series RS70000
• Interface connector	End location, DB-25P, Series 70000
• Frequency range	DC to 800MHz (depending on model number & throws)
• Impedance	50 ohm standard, 75 ohm optional
• Insertion loss	See Sections 3.3 and 4.3
• Isolation	See Sections 3.2 and 4.2
• Switching speed	1ms for dry contacts; 3ms for mercury wetted contacts
• Contact resistance	300 mOhm; 100mOhm for mercury wetted contacts
• Contact rating	100VDC, 0.25A, 10W (4VDC Max on self-terminating type -25, -27, -65, -67)
• Coil resistance	1K ohms std; 250 & 500 Ohms optional
• Coil current	28mA std (1K coil) per activated port
• Connector	BNC (standard), F-type, SMA, TNC optional on some models
• Power requirement	+15VDC, 0.6A on RS70000 Series; +24 to +28VDC std on 70000 Series
• Size	Dependent on Nx1 configuration
• Unit material	Aluminum alloy, corrosion resistant
• Operation temp range	0 to +50C
• Storage temp range	-20C to +60C