



REVISIONS					
LTR	ECO	DESCRIPTION	ENG	DATE	APVD

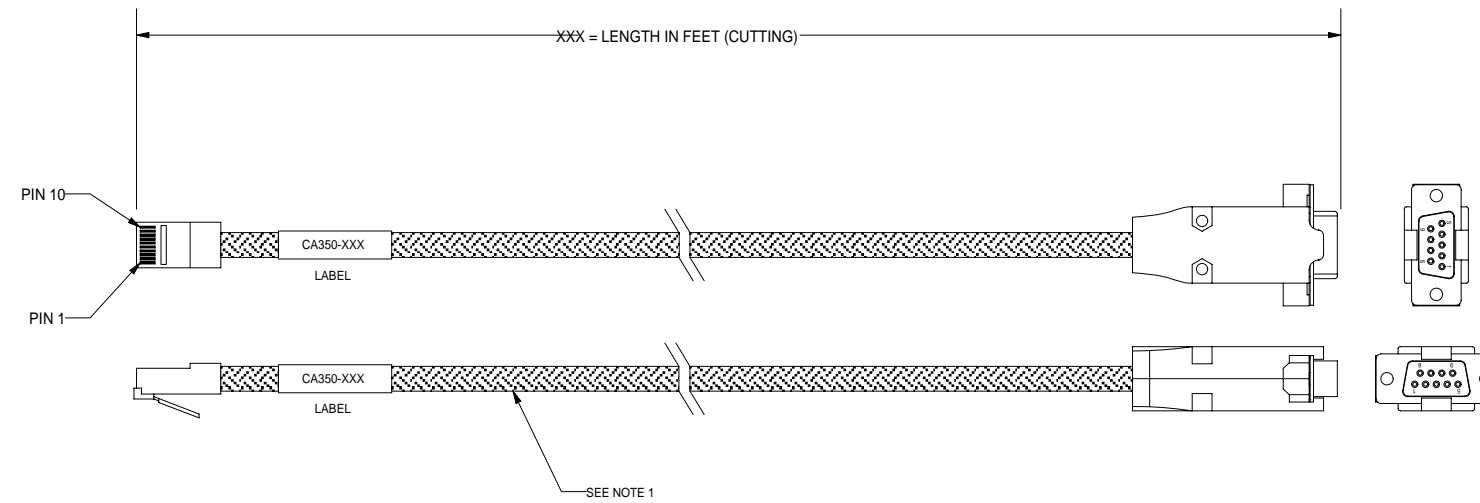


TO FLASH PORT
RJ-45 CONNECTOR (10 POSITIONS)
AMP: 5-557963-3

TO USER COMPUTER (SERIAL)
CONN-D TYPE-FML: 9 POS S-CUP
(US: 15005-21001)

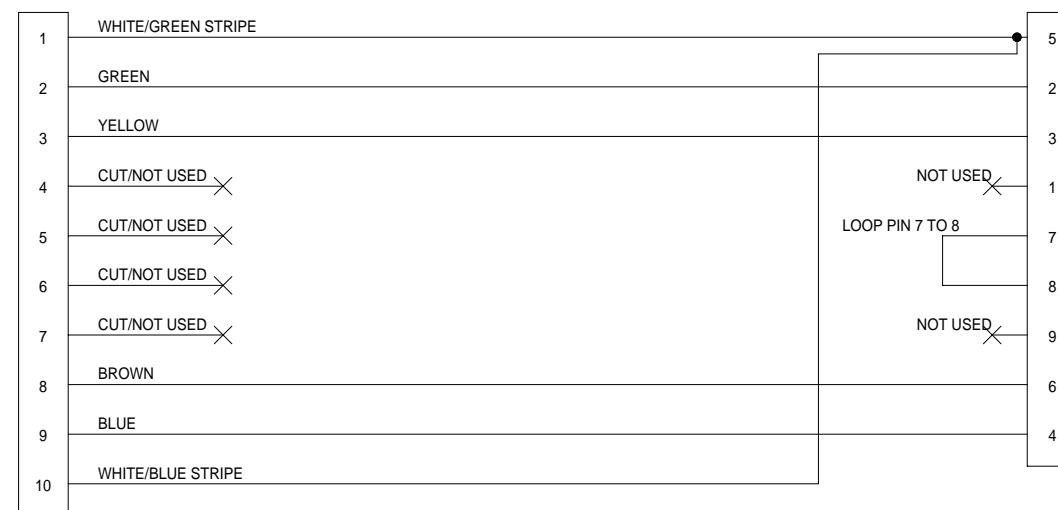

NOTE 1: QUABBIN DATAMAX MULTIPAIR UNSHIELDED
24 AWG STRANDED CABLE . PN/ 5410 OR EQUIVALENT

ITEM	QTY	PART NUMBER	DESCRIPTION	COMMENTS
PARTS LIST				
SIGNATURES		DATE	TITLE	 VAN NUYS, CA 91406 CAGE CODE 0W482 DWG NO. ACA350-01 REV
DWN	PTH	01-21-2004	CABLE DIAGRAM US FLASH CABLE FOR C710 CPU MODEL: CA350-XXX RELEASED PRODUCT	
CHK	NNH	00-00-2004		
ENG	ROL	00-00-2004		
APVD	HBJ	01-23-2004		
JOB#	XXXX			
FILE:	ACA350-01.FCM			
SC	1:1	SIZE	D	SHT 1 OF 1